

(12) UK Patent Application (19) GB (11) 2 308 448 (13) A

(43) Date of A Publication 25.06.1997

(21) Application No 9607274.9

(22) Date of Filing 09.04.1996

(30) Priority Data

(31) 95052016 (32) 19.12.1995 (33) KR

(71) Applicant(s)

Samsung Display Devices Co Ltd

(Incorporated in the Republic of Korea)

575 Shin -Dong, Paldal-gu, Suwon, Kyunggi-do,
Republic of Korea

(72) Inventor(s)

Hyeongdong Kim

(74) Agent and/or Address for Service

W P Thompson & Co
Celcon House, 289-293 High Holborn, LONDON,
WC1V 7HU, United Kingdom

(51) INT CL⁶

G06K 11/12

(52) UK CL (Edition O)

G1N NAQB N1D8 N1D9 N3S10 N7S

(56) Documents Cited

GB 2148011 A GB 2088063 A US 3911215 A

(58) Field of Search

UK CL (Edition O) G1N NAGB10 NAQB

INT CL⁶ G06K 11/12


Online: WPI

BEST AVAILABLE COPY

(54) Touch panel

(57) A touch panel with improved resistance to problems of cracking in an upper, resistive layer is made by substituting a phototransparent organic film 7 for the conventional resistive layer. As described the film 7 is formed of metal oxide powder in a polymer and has a resistivity of about 300-800 ohms/square. The panel has a transparent substrate 1 carrying a conductive layer 2, e.g. of indium tin oxide, a spacing layer 3, and the organic resistive film 7. The latter may be covered by a protective film structure (Fig. 4). The panel is stated to have an economic advantage in that it can be used perpetually if the conductive film in the lower part is not impaired.

FIG. 3

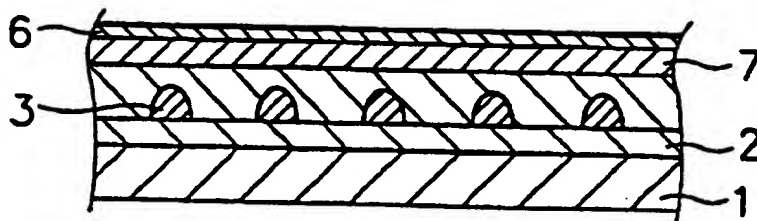

GB 2 308 448 A

5

This invention relates to a touch panel, more particularly, to a touch panel in which the contact conductive layer is substituted with phototransparent organic conductive films to give conductivity per se, thus not requiring coating process of conductive layer and resolving problems of crack owing to the conductive layer.

10

15

A touch input system including a touch panel which determines the position of an object which is in contact with a contact surface, has been used variously in the fields of computer graphics, design and manufacturing systems using computers. The touch system denotes a system consisting of a digitizer which responds to a touch on a distinctive position of a contact surface, and can be driven by touching with a finger of an operator because of a transparent covering layer on a conductive surface.

20

25

The driving principle of a touch panel in the touch panel system is as follows:

A contact surface of a touch panel has equal specific electric resistance and is connected to an

CLAIMS

1. A touch panel comprising:
a substrate made of a transparent insulated material;
a substrate conductive layer formed on said
5 substrate;
a dot space formed between said substrate conductive
layer and a contact conductive layer; and
a contact conductive layer causing change of electric
resistance by external contact on said dot space.

10 2. The touch panel of claim 1, wherein said
contact conductive layer consists of a
phototransparent organic conductive film.

15 3. The touch panel of claim 2, wherein said
contact conductive layer further comprises a
phototransparent conductive coating layer on one or
both sides of the phototransparent organic conductive
film.

20 4. The touch panel of claim 2, wherein said
contact conductive layer further comprises a
protective film layer on said phototransparent
organic conductive film.

25 5. The touch panel of any one of claim 1 to
claim 4, wherein said contact conductive layer
further comprises a hardcoating layer on the surface
thereof.

6. The touch panel of claim 2, wherein said
phototransparent organic conductive film is simply
manufactured by the method that white powder of metal

oxides consisting of indium oxide, antimony oxide, or tin oxide, etc. are added to an ordinary polymer for the formation of films to have the resistance value of 300 - 800 Ω/\square of the mixed polymer.

5

7. A touch panel substantially as described herein, with reference to the accompanying drawings.

10

15

20

25

FIG. 1

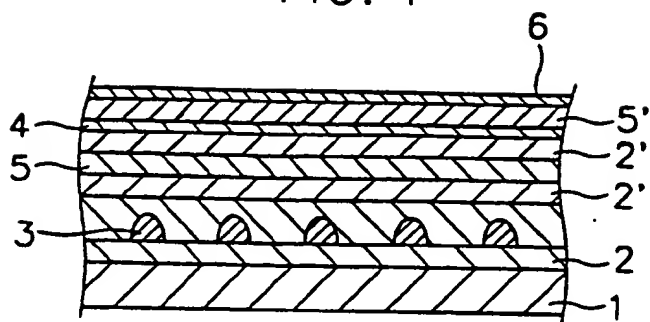


FIG. 2

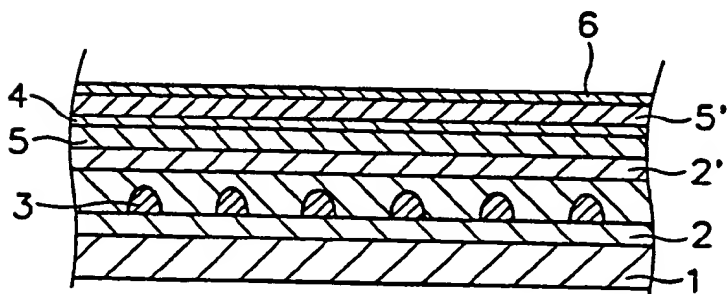


FIG. 3


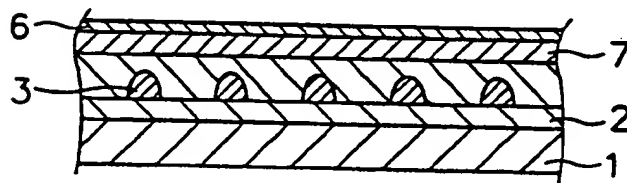


FIG. 4

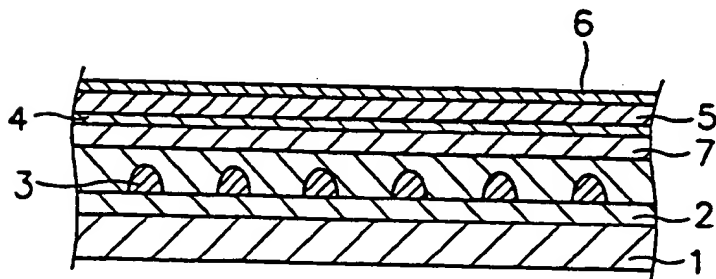

This Page is inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images problems checked, please do not report the problems to the IFW Image Problem Mailbox